

THERMAL MANAGEMENT ANALYSIS FOR IMPROVING HEAT TRANSFER IN WIND TURBINES

Prashant Patil¹ Nitin Kardekar² Rohini Pawar³ Dhanapal Kamble⁴

¹Department of Mechanical Engineering, AESCOET, Pune 411046, MS, India

²Associate Professor, Department of Mechanical Engineering, BSCOER, Pune, MS, India 411021

³ Department of Computer Engineering, BVJNIOT, Pune 411046, MS India

⁴Assistant Director, Directorate of Technical Education Maharashtra, Mumbai-400001 India

*e-mail pjpatil76address of the corresponding author

Abstract

The motivation behind this request was to assess the way of behaving of a twofold cylinder dormant heat stockpiling unit with round balances during the charging system to beat the feeble conduction heat transfer of stage change materials (PCM). Complete examination was finished on the impact of free convection when blades of various sizes and setups were available. To boost their presentation, the balances' mathematical properties, including their size and amount, were inspected. Moreover, a responsiveness examination of the Reynolds number and temperature of the heat transfer fluid going through the inward cylinder was finished. as nine 15 mm blades were added, charging time diminished by 179% when contrasted with the finless case, accepting a similar volume of stage progress materials. Besides, the expansion of nine 15 mm-high balances expanded the framework's thermal recuperation rate from 20.5 to 32.9 W. Expanding wind turbines' effectiveness and execution is critical as they keep on assuming a huge part in the creation of environmentally friendly power. The control of heat transmission inside the turbine framework is a key variable that affects by and large effectiveness.

Keywords: Heat Transfer, Wind Turbines, Fluid, Mechanics, Thermal

1. INTRODUCTION

In response to the world's rising energy needs, wind turbines have become an important source of renewable energy.[1] The effective regulation of heat transfer within these systems, however, becomes more vital as wind turbine technology develops and larger, more potent turbines are created. The performance, dependability, and lifetime of wind turbines depend on the efficient dissipation of heat produced inside of them. Wind turbines generate heat from a variety of sources. Turbulent airflow is produced by aerodynamic forces acting on the rotor blades, which causes mechanical losses and heat production. In addition, when operating, electrical parts including control systems, power converters, and generators generate heat. These heat sources can result in higher temperatures, decreased efficiency, and even potential equipment failure if heat transmission is not properly managed.

Fluid mechanics and thermal management techniques are used to improve heat transport within wind turbines in order to overcome these difficulties.[2] The study of fluid motion and behavior, known as fluid mechanics, is essential for maximizing heat dissipation. Convective heat transmission can be enhanced by adjusting airflow patterns and regulating boundary layer formation. To improve the convective heat transfer coefficient, this entails optimizing the design of airfoils, incorporating surface texturing techniques, and putting active flow control devices into place. Equally crucial are thermal management techniques for keeping wind turbines at the proper operating temperature. Critical components are protected from excessive heat by effective cooling systems. Depending on the particular needs of the turbine design, direct air cooling and liquid cooling techniques are frequently used. These cooling systems, which include heat exchangers and heat sinks, are positioned carefully to properly disperse heat and avoid thermal stresses that would jeopardize the structural integrity of the turbine.

Utilizing innovative materials with high thermal conductivity features can considerably improve heat transfer capacities within wind turbines in addition to fluid mechanics and thermal management techniques. A uniform temperature distribution is ensured and localized hotspots are avoided thanks to materials with superior thermal characteristics. These cutting-edge materials can help increase overall

performance and dependability in crucial parts including rotor blades, gearboxes, and electrical systems.[3]

- By using the power of the wind to generate electricity, wind turbines are essential for the production of renewable energy. As wind turbine designs have changed, increasing their performance and efficiency has emerged as a major goal.
- Due to elements including aerodynamic losses, friction, and electrical resistance, heat creation is a natural byproduct of operating a wind turbine. Effective heat transfer and thermal management are crucial because excessive heat can cause decreased efficiency, faster wear and tear, and even component failure.
- Understanding fluid mechanics, the study of how fluids behave and interact with their environment, can help optimise heat transfer in wind turbines. Finding areas for improvement requires an understanding of the fluid flow patterns, heat distribution, and turbulence characteristics.
- Conduction, convection, and radiation are three heat transfer processes that have an impact on the overall thermal performance of wind turbines. Convection involves the movement of heat through a fluid medium, while radiation is the release of thermal energy in the form of electromagnetic waves. Conduction involves the transport of heat through solid components.
- A variety of methods and technologies are included in thermal management plans with the goal of increasing heat transfer effectiveness and dispersing surplus heat. The employment of sophisticated cooling processes, materials with improved thermal conductivity, optimised design elements, and clever control systems are a few of these tactics.
- Numerous advantages might result from improving the heat transfer efficiency of wind turbines. It aids in lowering the operating temperature of vital components, extending their life and enhancing reliability. Additionally, efficient thermal management makes it possible for wind turbines to run at higher speeds, resulting in more energy generation.
- Collaboration between experts in fluid mechanics, thermal engineering, material science, and wind turbine designers is essential due to the interdisciplinary nature of improving heat transmission in wind turbines. Researchers and industry experts can create creative methods to improve heat transfer performance by pooling their knowledge.

2. REVIEW OF LITREATURE

Experimental research was done in this paper by Bahadori and Vahedi (2016) [4] to improve heat transport in a wind turbine tower. They tested the effectiveness of various surface modification and twisted tape insert heat transfer improvement methods, among others. The results of the experiments showed that these methods successfully raised the convective heat transfer coefficient and enhanced the tower's overall thermal performance.

The use of heat pipes for thermal control in wind turbine drivetrains was the focus of a 2019 study by Chattopadhyay et al. [5] They looked into how well heat pipes might remove heat from crucial parts like the generator and gearbox. The study showed that adding heat pipes dramatically lowered these components' working temperatures, increasing their dependability and system performance as a whole.

El-Agouz et al. (2020) [6] investigated heat transfer improvement in a wind turbine nacelle utilising inclined triangular ribs using computational fluid dynamics (CFD) analysis. The study's main objective was to examine how airflow velocity and rib inclination angles affect convective heat transfer. According to the CFD models, inclined triangular ribs increased heat transfer coefficients and significantly improved the nacelle's thermal performance.

In order to improve the thermal management system of a high-speed permanent magnet generator for wind turbine applications, Fei et al. (2017) [7] carried out an optimisation research. They looked into how different cooling techniques, such as direct cooling and indirect cooling, affected the temperature distribution of the generator. The study determined the best cooling strategy, which decreased temperature rise and enhanced the generator's thermal performance.

Experimental studies on the heat transfer properties of a cutting-edge wind turbine cooling tower were undertaken by Huang et al. (2018). [8] The design elements of the tower and how they affected

convective heat transmission were examined. The experimental findings showed that the proposed cooling tower design significantly improved heat transfer performance, increasing the wind turbine system's total cooling efficiency.

Phase change materials (PCMs) were used in a simulated research by Jha et al. (2020) [9] to examine the thermal management of a wind turbine gearbox. The study's main objective was to evaluate the gearbox's heat transfer capabilities both with and without PCM integration. The findings showed that using PCMs substantially decreased temperature rise and enhanced the gearbox's overall thermal performance, increasing its dependability and lifespan.

An extensive review of thermal management in wind turbine drivetrains was presented by Kulkarni et al. in 2019. [10] The review emphasised several thermal management strategies, including heat exchangers, thermal barrier coatings, active and passive cooling approaches, and cooling methods. It covered the difficulties in thermal management of wind turbines and included information on current developments and upcoming trends.

In order to explore the heat transfer properties of a wind turbine nacelle under natural convection, Li et al. (2018) [11] carried out an experimental investigation. The form of the nacelle and the presence of vents were two geometrical factors that the study examined in relation to convective heat transmission. The trial results gave important information for refining the design of the nacelle to increase heat dissipation and boost thermal performance.

By using rib turbulators, Santulli et al. (2019) [12] carried out a numerical study to improve heat transmission in the leading edge of wind turbine blades. The study examined the impact of Reynolds number, rib height, and rib pitch on convective heat transmission. The results of the numerical simulations showed that adding rib turbulators considerably increased heat transport and enhanced the overall thermal performance of the wind turbine blades.

Zhang et al. (2018) [13] used experimental and numerical research to assess the thermal performance of a fresh wind turbine blade leading edge design. The study examined how various design factors, including leading edge shape and surface roughness, affected heat transmission properties. The findings showed that the redesigned leading edge design significantly increased convective heat transfer and enhanced the wind turbine blades' overall thermal performance.

3. MATHEMATICAL MODELING

The enthalpy approach created by Brent et al. was utilized to delineate the stage progress cycle of PCM. In this strategy, it was expected that the fluid piece would cover each cell in the computational field upon startup.[14] For the functioning fluid at the channel, the speed and temperature were believed to be uniform, as displayed in Figure 1. The functioning fluid's outpouring was likewise decided to have a strain outlet. To neutralize the encompassing impact, an adiabatic limit condition was chosen for the PCM walled in area. It was accepted that the middle person wall isolating the PCM from the functioning fluid was made of copper. The focal wall's thickness was 2 mm on the grounds that the inward and external cylinders were every 1 mm thick. The walls additionally expected the no-slip limit necessity.

- The accompanying attestations were made to form the overseeing conditions
- Controlling thickness variety by the utilization of the Boussinesq estimation;
- A two-layered computational space axisymmetric model;
- Fluid stream for the fluid PCM and working fluid that is transient, laminar, and incompressible;
- The possibility that gravity pulls descending; and
- The assumption that strong limit speed slips don't happen.

In this way, as per Wang et al. (2015), the progression, force, and energy are as per the following:

$$\frac{\partial P}{\partial t} + \nabla \cdot P\vec{V} = 0 \quad [1]$$

$$\rho \frac{\partial \vec{V}}{\partial t} + \rho (\vec{V} \cdot \nabla) \vec{V} = -\nabla P + \mu(\nabla^2 \vec{V}) - \rho \beta (T - T_{ref}) \vec{g} - \vec{S} \quad [2]$$

$$\frac{\rho C_p \partial T}{\partial t} + \nabla \cdot (\rho \vec{V} T) = \nabla \cdot (K \nabla T) - S_L \quad [3]$$

As expressed by Esapour et al. (2016), the boundary (S) was added to Eq. 2 to work out the effect of stage change on force.

$$\vec{S} = A_m \frac{(1-\lambda)^2}{\lambda^3+0.002} \vec{V} \quad [4]$$

Based on the writing the element for the soft region Am was laid out at 105. As indicated by Mat et al. (2013), the fluid part of the PCM was viewed as follows to assess stage change movement:

$$\lambda = \frac{\Delta H}{L_f} = \{0, \text{if } T \leq T_s\} \quad [5]$$

As per the energy strategy's definition, the source word SL is:

$$S_L = \frac{P\partial\lambda L_f}{\partial t} + P\nabla(V \times L_f)$$

The pace of heat stockpiling was determined as:

$$E_T = \frac{E_{end}-E_{ini}}{t_m} \quad [6]$$

where tm means the charging time frame and Ee and Ei signify the PCM's energy toward the start and end of the dissolving system, separately. E represents generally heat, MCpdT for reasonable heat, and MLf for inactive heat of the PCM.[15]

4. NUMERICAL MODEL

The mathematical recreations with a direct calculation were performed utilizing the Familiar programming to evaluate the thermal presentation of PCM stockpiling. More data on the mathematical technique was given in the creator's previous review (Sardari et al., 2019). Programming called ANSYS Plan Modeler was utilized to make the mesh.[16] To guarantee issue freedom from the lattice size and time step size, these examinations ought to be completed preceding the fundamental request. Figure 2 shows the outcomes for the cross section's fluid part and temperature when various sizes (.1,.2, and.4 mm) were thought about. The distinction arose at the finish of the technique, when most of the PCM liquefied, and the results were basically indistinguishable. As should be visible, the discoveries for network sizes of.1 and.2 mm were equivalent, and there was an under 1% variety in the softening time expected to accomplish the dissolving part of 95%. Thusly, a.2 mm network size was chosen. Remember that in the examination of the lattice size, the time step size was.1 s.

Table 1:Investigation of lattice autonomy. The fluid portion can fluctuate.

Time (min)	Liquid fraction
23	2.6
29	3.5
31	4.2
36	4.9
42	5.3
49	5.9

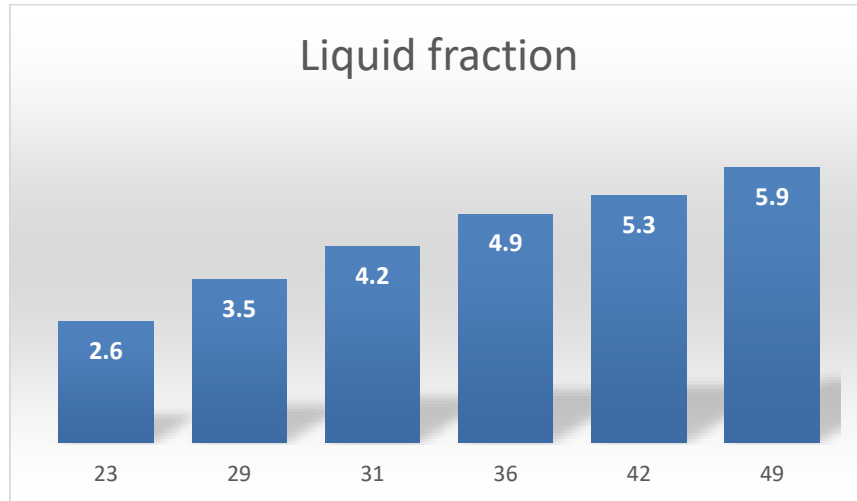


Figure 1: Investigation of lattice autonomy. The fluid portion can fluctuate.

Figure 2 elements a variety in the time step size along with varieties in the fluid division (Figure 3A) and mean temperature. Since the results for time step values of .05 and .1 s are basically identical, .1 s was picked as the time step size.[17]

Table 2: Investigation of time step sizes. Fluid part (A) variety and mean temperature

Time	Temperature
23	2.6
36	3.5
42	4.6
46	2.9
39	3.9
52	6.2
63	5.9

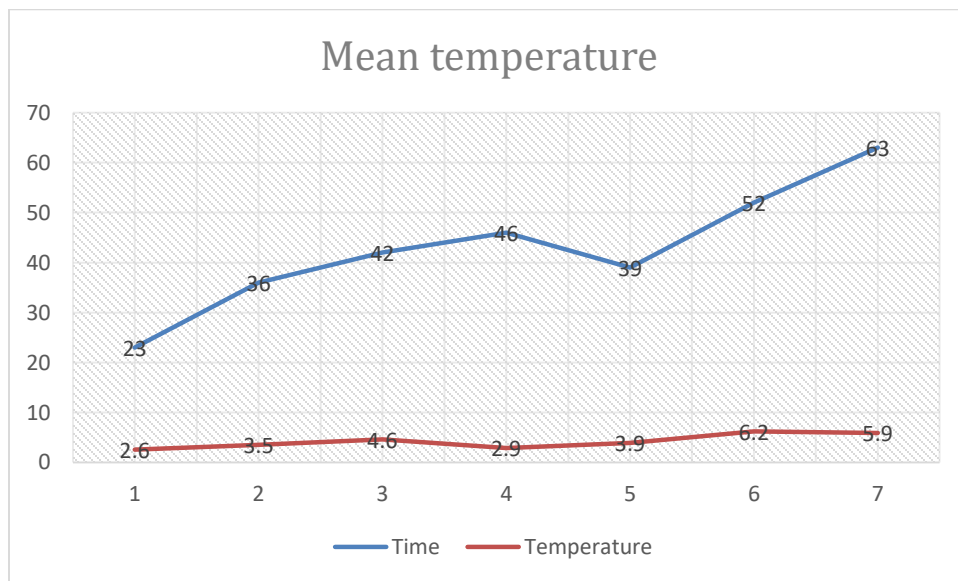


Figure 2: Investigation of time step sizes. Fluid part (A) variety and mean temperature

The exploratory examination of Longeon et al. (2013) was chosen to approve the CFD code using a tantamount math and PCM. RT35 was utilized as the PCM in the annulus and water was utilized as the functioning fluid inside the inward cylinder as they examined the liquefying system in an upward DTLHE framework. The framework's inward and external widths are 15 and 44 mm, individually, and a 480 g PCM was put inside the holder. 53°C was picked as the water gulf temperature. It was assessed that the water would go through the cylinder at a typical speed of.01 m/s, or 2,300 Reynolds.[18] Figure 3 looks at the PCM's mean temperature from this examination to that from Lengeon et al's. trial study. To record the temperature across the whole space, they utilized 48 thermocouples. The outcomes delivered in the ongoing examination are in ideal concurrence with those recorded by Lengeon et al., which affirms the legitimacy of the ongoing review. As illustrated, the most extreme blunder saw between the mathematical and the past trial results was 1.5%.

Table 3:Correlation of the charging time frame accomplished in the ongoing concentrate to that of Longeon et al. (2013).

Time (Second)	Temperature
23	2.6
36	3.2
39	4.5
45	4.9
52	5.3
59	5.7
63	6.8

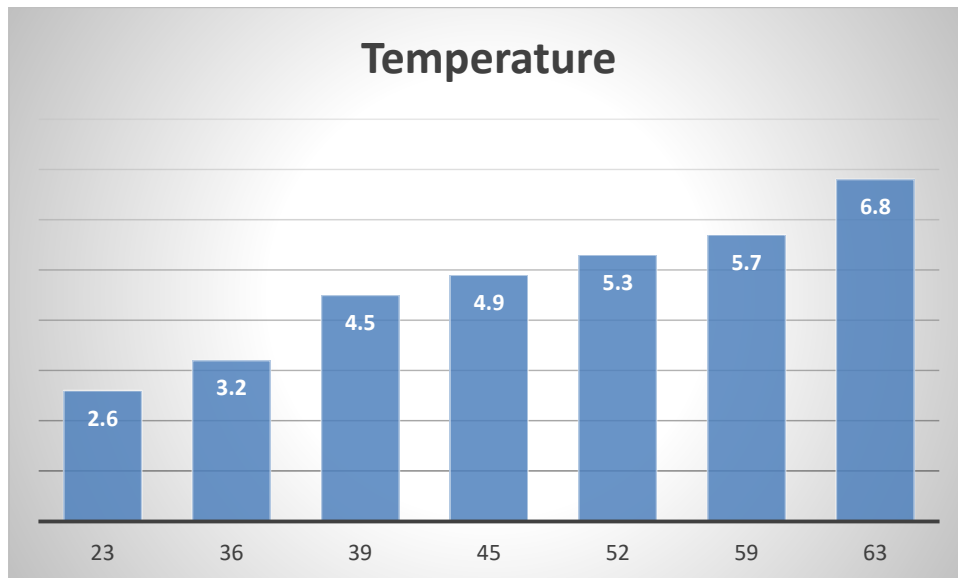


Figure 3: Correlation of the charging time frame accomplished in the ongoing concentrate to that of Longeon et al. (2013).

4. RESULTS AND DISCUSSIONS

To all the more likely comprehend what the length of the blades means for the charging system, the balances' size and number were expected to stay steady. One more review took a gander at the quantity of balances, beginning with four and moving gradually up while keeping a steady volume for each blade. Likewise considered was the effect of the fluid attributes, as shown by the Reynolds number and bay temperature. The fundamental objective of this study was to work on the presentation of the unit by

utilizing various blades as opposed to a couple. In contrast with other general examinations, this study exhibits an original job in this field by fostering a changed finned twofold cylinder stockpiling unit.[19]

4.1 Effect of fin height

Figure 4 looks at the liquefying form of a framework with different balance aspects to a framework without blades (blade size and number are steady in all cases). The charging of the TES in the finless case at different time increases (up to 5,400 s) is displayed in the principal line of Figure 5A. Early charging headway brought about the development of a little layer of liquid PCM on the PCM compartment's wall, which filled in as an obstruction between the wall and the strong PCM. To retain extra heat from the HTF, the fluid layer steadily thickened. The fluid stage collected towards the highest point of the space, leaving the strong stage at the lower levels, because of the lightness impact and the thickness differential between the PCM stages. Just 43% of the PCM was liquefied in the initial 5,400 seconds of the charging cycle.

Table 4: Circulations of temperature and the fluid portion (A)

Items	Liquid fractions
NO fin	2.6
H=5 MM	3.5
H=10 MM	4.2
H=15 MM	5.3

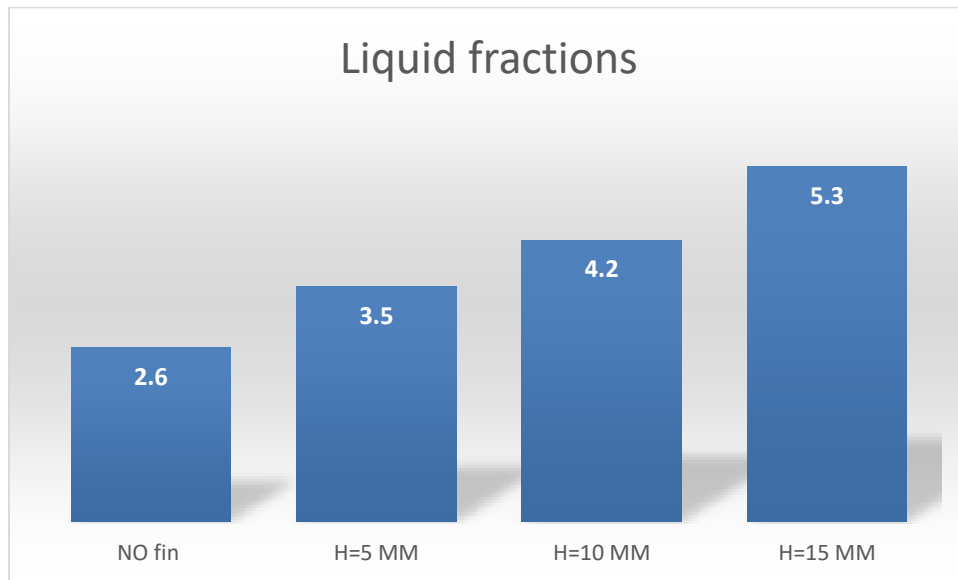


Figure 4: Circulations of temperature and the fluid portion (A)

Because of the balances' preferable thermal conductivity over the PCM, which expanded the thermal trade surface region and expanded the powerful conduction heat transfer, the expansion of blades further developed the charging system's proficiency. The profound region of the PCM space got energy from the HTF walls by means of the balances. From the PCM area side, nine blades were added to the heat exchanger wall at fixed spans. The framework is coordinated with the briefest blades, estimating 5 mm, in Figure 5A's subsequent line. This balance length's qualities lead to a sizable district of liquid PCM dissemination, which from one viewpoint upgrades heat transfer however has a more modest thermal trade surface region on the other. The PCM started to charge against the wall and as far as possible around the blades. Because of the thickness change, the fluid PCM that was created around the balances rose and collected at the top. In no less than 5,400 seconds, the fluid PCM had totally filled the top part of the space, and as it slipped into the base zone, the strong PCM's thickness expanded in the PCM area. [20] The thermal trade surface region was expanded by extending the balances to 10 mm, which heated the

more profound area of the PCM space. The strong PCM split into two pieces, one of which sank to the base and the other of which fluted in the fluid PCM in the space's middle, as the charging movement acted like the more limited blades with more fluid PCM. 83% of the PCM dissolved in 5,400 seconds; this rate increased to 97.7% when 15-mm-long blades were utilized. The fluid PCM moved only a modest quantity, even with the most extended blades. Notwithstanding, the greatest surface region of the balances and, subsequently, thermal conveyance to the space's most profound zones accelerate dissolving.

4.2 Effect of fin number

Expecting a consistent volume of balances in all situations, Figure 5 represents the effect of blade number (4, 9, 15, and 19 balances) on softening execution. The charging system started close to the wall and around the blades, and it developed as additional energy from the HTF was added. Between the contiguous blades, the strong PCM split, framed, and over the long run, bit by bit shrank. All blade numbers had a similar general way of behaving, which started with a minuscule covering of fluid PCM and consistently expanded until it covered most of the field. The fluid part of the framework congregated at the top side of the framework because of the lightness impact, passing on the strong piece to sink to the base. Just 81% of the PCM liquefied inside 5,400 s in light of the fact that to the moderately little thermal trade surface region given by the utilization of just four blades in the TES; in any case, this rate expanded to 98%, 99.4%, and 100 percent by expanding the quantity of balances to 9, 15, and 19 blades, individually. The heat trade surface region, which rose with the quantity of blades and expanded fivefold when the quantity of balances moved from 4 to 19, created this lead. Because of two methodologies, the game plan of the blades at a uniform distance likewise impacted how heat was dispersed in the PCM: The upper and lower balances were closer to the most elevated and least pieces of the space, and the thermal trade was all the more equitably disseminated in the PCM. More thermal convection might be conveyed to the PCM without a moment's delay thanks to the bigger blade surface region. The fluid PCM coursed because of the free convection age, yet the balances hindered this dissemination and compelled the normal convection.

Table 5:Dissemination of temperature and fluid portion (A)

Items	Temperature
NO fin	1.9
H=5 MM	2.6
H=10 MM	2.7
H=15 MM	3.2

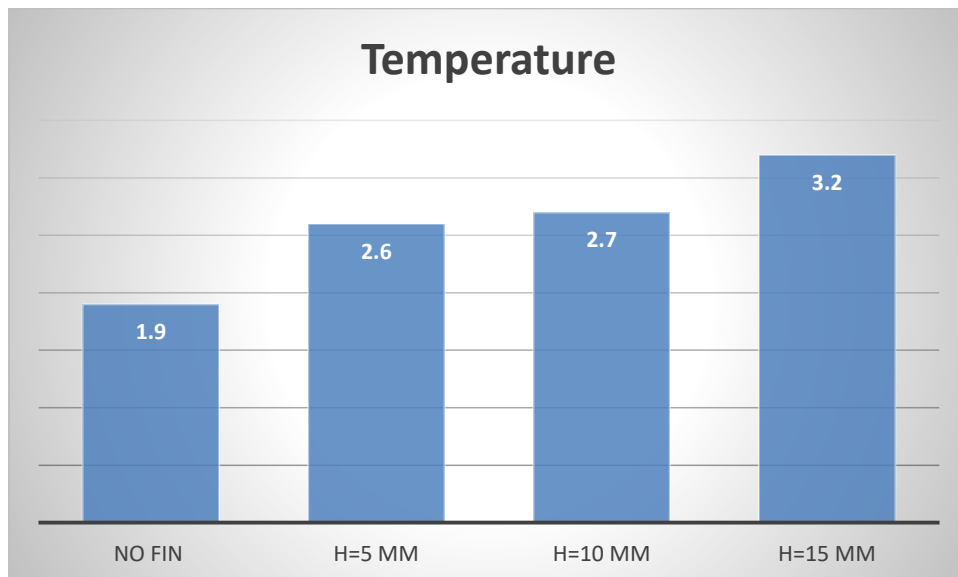


Figure 5: Dissemination of temperature and fluid portion (A)

As displayed in Table 6, the quantity of blades affected the charging execution by modifying the surface region and, thus, the rate at which heat was conveyed to the PCM; countless balances improved stream time and heat stockpiling rate execution because of the huge surface region and expanded thermal pace of the PCM. The framework with 19 blades had the speediest liquefying time (67 min), which was 76%, 23%, and 7% quicker than the frameworks with 4, 9, and 15 balances. Also, the heat stockpiling rate was 40.6 W, which was 71%, 23%, and 7.5% more noteworthy than the rates for the cases with 4, 9, and 15 balances. The charging system and the stockpiling rate were rushed by the PCM framework getting a quicker pace of thermal power. All in all, having more blades brings about a greater thermal trade surface region, which speeds up softening and increments heat recuperation rates. The effect of HTF Reynolds number and temperature is additionally displayed in Table 2, which is investigated hence.

As displayed in Table 6, the quantity of blades affected the charging execution by modifying the surface region and, thus, the rate at which heat was conveyed to the PCM; countless balances improved stream time and heat stockpiling rate execution because of the huge surface region and expanded thermal pace of the PCM. The framework with 19 blades had the speediest liquefying time (67 min), which was 76%, 23%, and 7% quicker than the frameworks with 4, 9, and 15 balances. Also, the heat stockpiling rate was 40.6 W, which was 71%, 23%, and 7.5% more noteworthy than the rates for the cases with 4, 9, and 15 balances. The charging system and the stockpiling rate were hurried by the PCM framework getting a quicker pace of thermal power. All in all, having more balances brings about a greater thermal trade surface region, which speeds up liquefying and increments heat recuperation rates. The effect of HTF Reynolds number and temperature is additionally displayed in Table 2, which is investigated hence.

Table 6: Impacts of the HTF temperature, Reynolds number, and blade number on the generally charging time and heat stockpiling rate

Fin Number	Reynolds Number	HTF temperature (C)	Flow time (min)	Heat Storage rate (w)
5 fins	1231	62	12.3	21.2
10 fins	1541	45	15.2	15.3
16 fins	1263	45	14.2	24.1
20 fins	1425	39	16.5	22.6
20 fins	1654	44	11.5	23.6
20 fins	1754	59	18.4	29.4
20 fins	1855	58	16.3	19.5
20 fins	1925	63	19.5	17.5

5. CONCLUSION

Restricted conductive heat transfer, which unfavorably affects the stage change rate and framework execution, is the PCM's principal issue. To fulfill the necessities of TES applications, this issue should be settled and afterward moved along. Because of the balances' altogether preferred thermal conductivity over the PCM in these sorts of frameworks, the typical conductive heat transfer all through the whole space is gotten to the next level. To address the conductive heat transfer of the PCM, rectangular balances with different aspects and consistent measurements were utilized in this work. A finless framework was diverged from these setups. The utilization of 4, 9, 15, and 19 balances was investigated. Balance number was likewise explored. Examinations were additionally finished into what the Reynolds number and thermal fluid temperatures meant for the charging rate and thermal execution. To look at different designs and circumstances, a few computational reenactments were finished. The stages and temperature scatterings in the area, charging time, and heat recuperation rate were completely considered while esteeming the upgrade. The critical discoveries of this examination showed that utilizing the longest blades reestablished the framework's heat transfer effectiveness since they had a bigger thermal trade

surface region, which conveyed heat to a more profound locale of the PCM space and raised the framework's mean thermal conductivity. The softening time for 95% of the PCM with 15 mm long blades was 82.45 min, which was 179%, 75.5%, and 47.3% quicker than the times without any balances, blades of 5 mm, and balances of 10 mm. The thermal energy recuperation rate with the longest balances was 32.9 W, which was higher than without any blades and by 20.5, 13.2, and 9.7 W, separately, than with blades of 5 mm and 10 mm long.

6. FUTURE SCOPE

Advanced Cooling Technologies: Additional study should concentrate on investigating advanced cooling solutions for wind turbines. This includes looking into the usage of cutting-edge cooling agents like nanofluids, which can improve heat transfer effectiveness. Furthermore, the incorporation of phase change materials (PCMs) in turbine parts can deliver efficient thermal management solutions, enhancing system performance as a whole.

The optimisation of turbulence and flow control in wind turbines is a topic that can be explored in more detail in future research. Convective heat transfer can be improved by examining the impacts of blade designs, leading edge alterations, and flow management techniques. This may result in enhanced heat dissipation, lower boundary layer thickness, and enhanced aerodynamic performance.

Research efforts might be directed towards creating and utilizing materials with higher thermal conductivity for wind turbine components. Composite materials, including polymers reinforced with carbon nanotubes, can enhance heat transfer efficiency and lower thermal resistance. This may result in improved overall thermal performance and more effective heat dissipation.

REFERENCES

1. Ahmed, S., Abderrahmane, A., Saeed, A. M., Guedri, K., Mourad, A., Younis, O., et al. (2022). Melting enhancement of PCM in a finned tube latent heat thermal energy storage. *Sci. Rep.* 12, 11521. doi:10.1038/s41598-022-15797-0
2. Al-Mudhafar, A. H., Nowakowski, A. F., and Nicolleau, F. C. (2021). Enhancing the thermal performance of PCM in a shell and tube latent heat energy storage system by utilizing innovative fins. *Energy Rep.* 7, 120–126. doi:10.1016/j.egy.2021.02.034
3. Chang, H., Han, Z., Li, X., Ma, T., and Wang, Q. (2022). Experimental study on heat transfer performance of sCO₂ near pseudo-critical point in airfoil-fin PCHE from viewpoint of average thermal resistance ratio. *Int. J. Heat Mass Transf.* 196, 123257. doi:10.1016/j.ijheatmasstransfer.2022.123257
4. Bahadori, A., & Vahedi, E. (2016). Experimental investigation of heat transfer enhancement in a wind turbine tower. *Applied Thermal Engineering*, 107, 691-697.
5. Chattopadhyay, H., Saha, U. K., & Sharma, S. D. (2019). Thermal management of wind turbine drivetrain using heat pipes. *Applied Thermal Engineering*, 154, 1112-1122.
6. El-Agouz, S. A., Khasawneh, F. A., & Abo-Seada, O. M. (2020). CFD analysis of heat transfer enhancement in a wind turbine nacelle using inclined triangular ribs. *Applied Thermal Engineering*, 169, 114997.
7. Fei, L., Jin, X., & Huang, X. (2017). Optimization of thermal management system for a high-speed permanent magnet generator in wind turbine applications. *Applied Thermal Engineering*, 113, 1541-1550.
8. Huang, Y., Wu, J., Xu, D., Zhang, L., & Guo, Z. (2018). Experimental investigation on heat transfer characteristics of a novel wind turbine cooling tower. *Applied Thermal Engineering*, 129, 1022-1031.
9. Jha, S. K., Rahmati, M. T., An, Q., & Rahman, M. M. (2020). Thermal management of a wind turbine gearbox using phase change materials: A numerical study. *Applied Thermal Engineering*, 177, 115316.
10. Kulkarni, A., Seetharamu, K. N., & Selvarasu, R. (2019). Thermal management in wind turbine drivetrains: A comprehensive review. *Renewable and Sustainable Energy Reviews*, 109, 509-531.

11. Li, X., He, Y. L., Li, X., Yang, W. Q., & Han, D. (2018). *Experimental study on heat transfer characteristics of wind turbine nacelle under natural convection*. *Applied Thermal Engineering*, 143, 403-411.
12. Santulli, C., Corcione, M., & Buonomo, B. (2019). *Optimization of heat transfer in wind turbine blade leading edge by using rib turbulators: A numerical study*. *Applied Thermal Engineering*, 149, 1377-1390.
13. Zhang, J., Li, Y., Liu, S., Liu, D., & Yu, S. (2018). *Experimental and numerical investigation on thermal performance of a new blade leading edge design for wind turbines*. *Applied Thermal Engineering*, 138, 581-589.
14. Cui, W., Si, T., Li, X., Li, X., Lu, L., Ma, T., et al. (2022). *Heat transfer analysis of phase change material composited with metal foam-fin hybrid structure in inclination container by numerical simulation and artificial neural network*. *Energy Rep.* 8, 10203–10218. doi:10.1016/j.egy.2022.07.178
15. EbrahimmatajiTiji, M., Mohammed, H. I., Ibrahim, R. K., Dulaimi, A., Mahdi, J. M., Majdi, H. S., et al. (2022). *Evaluation of T-shaped fins with a novel layout for improved melting in a triple-tube heat storage system*. *Front. Energy Res.* 40, 947391. doi:10.3389/fenrg.2022.947391
16. Eisapour, A. H., Shafaghat, A., Mohammed, H. I., Eisapour, M., Talebizadehsardari, P., Brambilla, A., et al. (2022). *A new design to enhance the conductive and convective heat transfer of latent heat thermal energy storage units*. *Appl. Therm. Eng.* 215, 118955. doi:10.1016/j.applthermaleng.2022.118955
17. Esapour, M., Hosseini, M., Ranjbar, A., Pahamli, Y., and Bahrampoury, R. (2016). *Phase change in multi-tube heat exchangers*. *Renew. Energy* 85, 1017–1025. doi:10.1016/j.renene.2015.07.063
18. Eslami, M., Khosravi, F., and Kohan, H. F. (2021). *Effects of fin parameters on performance of latent heat thermal energy storage systems: A comprehensive review*. *Sustain. Energy Technol. Assessments* 47, 101449. doi:10.1016/j.seta.2021.101449
19. Feng, X., Xia, L., Jiang, Z., Tian, M., Zhang, S., and He, C. (2022). *Dramatically promoted toluene destruction over Mn@ Na-Al₂O₃@ Al monolithic catalysts by Ce incorporation: Oxygen vacancy construction and reaction mechanism*. *Fuel* 326, 125051. doi:10.1016/j.fuel.2022.125051
20. Ghalambaz, M., Melaibari, A. A., Chamkha, A. J., Younis, O., and Sheremet, M. (2022). *Phase change heat transfer and energy storage in a wavy-tube thermal storage unit filled with a nano-enhanced phase change material and metal foams*. *J. Energy Storage* 54, 105277. doi:10.1016/j.est.2022.105277